


5.5" L FASCIA SYSTEM

Tube & Fabric Deductions

5.5" L Fascia Duo Shade with Somfy 40/30 motor

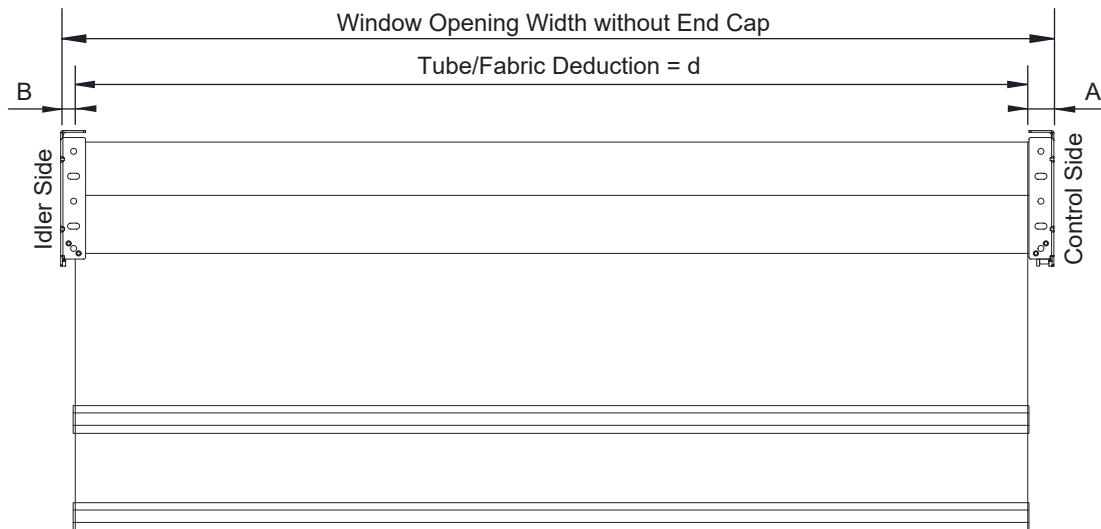

| Bracket | Control Side | Idle Side | Tube | A | B | d |
|---------|--------------|----------------------|----------------------|-----------------|----------------|------------------|
| XL | ST40 Motor | XL-B01 | RS-032 | 22mm (7/8") | 14.5mm (9/16") | 36.5mm (1 7/16") |
| | ST30 Motor | XL-A01/XL-B01/XL-C01 | RS-T46/RS-2TU/RS-3TU | 19mm (3/4") | 14.5mm (9/16") | 33.5mm (1 5/16") |
| | ST30WF Motor | XL-A01/XL-B01 | RS-T46/RS-2TU | 17.5mm (11/16") | 14.5mm (9/16") | 32mm (1 3/4") |
| | | XL-011 | RS-T56 | 17.5mm (11/16") | 13mm (1/2") | 30.5mm (1 3/16") |
| RS | ST40 Motor | RS-016 | RS-032 | 22mm (7/8") | 14.5mm (9/16") | 36.5mm (1 7/16") |
| | ST30 Motor | RS-027/RS-016/RS-022 | RS-T46/RS-2TU/RS-3TU | 19mm (3/4") | 14.5mm (9/16") | 33.5mm (1 5/16") |
| | ST30WF Motor | RS-027/RS-016 | RS-T46/RS-2TU | 17.5mm (11/16") | 14.5mm (9/16") | 32mm (1 3/4") |
| | | RS-049 | RS-T56 | 17.5mm (11/16") | 13mm (1/2") | 30.5mm (1 3/16") |


Note:

1. Use this table as a guideline only.
2. Deduction with 1-2mm tolerance.
3. End cap thickness is 1/8".


5.5" L FASCIA SYSTEM

Tube & Fabric Deductions

5.5" L Fascia Bracket with Somfy 50 AC/DC Motor & Swivel Ball Bearing SINGLE BAND

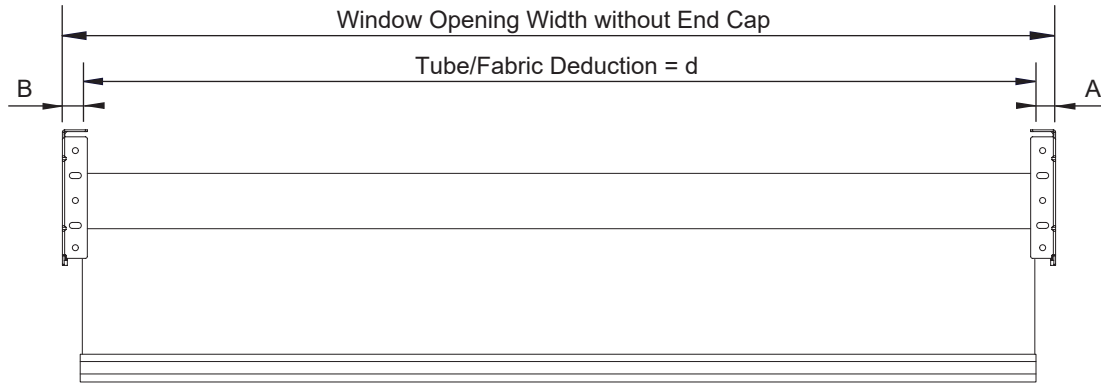


SONESSE® 50 AC



SONESSE® 50 DC

| Tube | A | B | d | A | B | d |
|--------|----------------|----------------|----------------|----------------|----------------|----------------|
| RS-013 | 20mm (0.79") | 24.2mm (0.95") | 44.2mm (1.74") | 20mm (0.79") | 27.2mm (1.07") | 47.2mm (1.86") |
| RS-033 | 21.5mm (0.85") | 25.7mm (1.01") | 47.2mm (1.86") | 21.5mm (0.85") | 28.7mm (1.13") | 50.2mm (1.98") |
| RS-T66 | 22.4mm (0.88") | 26.6mm (1.05") | 49mm (1.93") | 22.4mm (0.88") | 29.6mm (1.17") | 52mm (2.05") |

5.5" L Fascia Bracket with Somfy 50 AC/DC Motor & Swivel Ball Bearing MULTI BAND

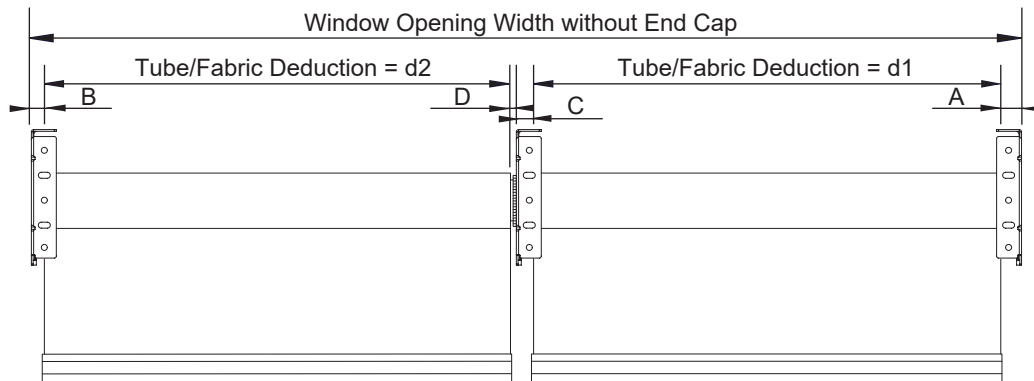

| Tube | A | B | C | D | d1=A+C | d2=B+D |
|--------|----------------|----------------|----------------|---------------|----------------|----------------|
| RS-013 | 20mm (0.79") | 20mm (0.79") | 15.8mm (0.62") | 6.5mm (0.26") | 35.8mm (1.41") | 26.5mm (1.05") |
| RS-033 | 21.5mm (0.85") | 21.5mm (0.85") | 17.3mm (0.31") | 8mm (0.31") | 38.8mm (1.53") | 29.5mm (1.16") |
| RS-T66 | 22.4mm (0.88") | 22.4mm (0.88") | 18.2mm (0.72") | 8.9mm (0.35") | 40.6mm (1.60") | 31.3mm (1.23") |

Note:

1. Use this table as a guideline only.
2. Deduction with 1-2mm tolerance.
3. End cap thickness is 1/8".