

# Green 3000

# 3%



**GREENGUARD**

PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/GG  
UL 2818

GOLD

Oyster

Oyster/Beige

Oyster/Grey

Oyster/Chestnut

Oyster/Charcoal

# Green 3000

# 3%

## SPECIFICATIONS


**3% OPENING** Fire Classification NFPA 701-2010 Test Method #1

Standard Colors:

Oyster, Oyster/Beige, Oyster/Grey, Oyster/Chestnut, Oyster/Charcoal

<b>Openness Factor :</b>	Approximately 3%	<b>Yarn diameter (in.):</b>	0.013
<b>UV Blockage:</b>	Approximately 97%	<b>Fabric thickness (in.):</b>	0.026
<b>Standard Widths:</b>	98.5" (250 cm)	<b>Color fastness:</b>	Grade 6-7
<b>Standard Roll Length:</b>	33 linear yards (30m.)		ISO 105-B02-1994 Xenon Arc Lamp
<b>Composition:</b>	25% Polyester, 75% Vinyl on Polyester	<b>Environmental Certification:</b>	
<b>Mesh/in:</b>	48 Warp, 52Fill		GREEN 3000-3% has achieved GREENGUARD GOLD certification
<b>Mesh Weight:</b>	12.68 oz./yd <sup>2</sup>		

## APPLICATIONS

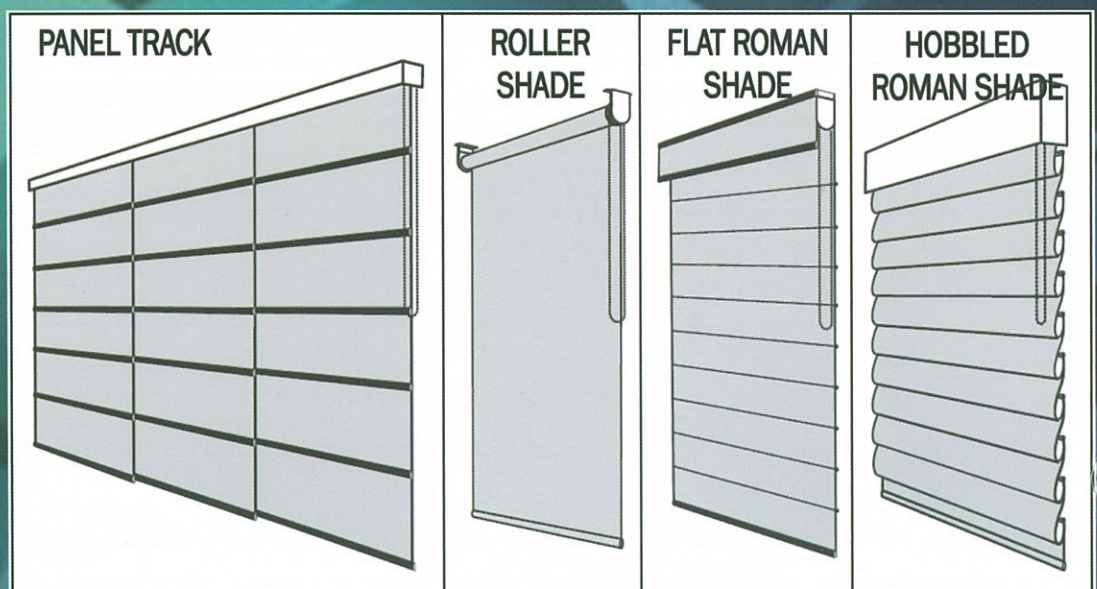

**GREENGUARD**

PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/GG  
UL 2818

**GOLD**