Green 4000

3% Opening

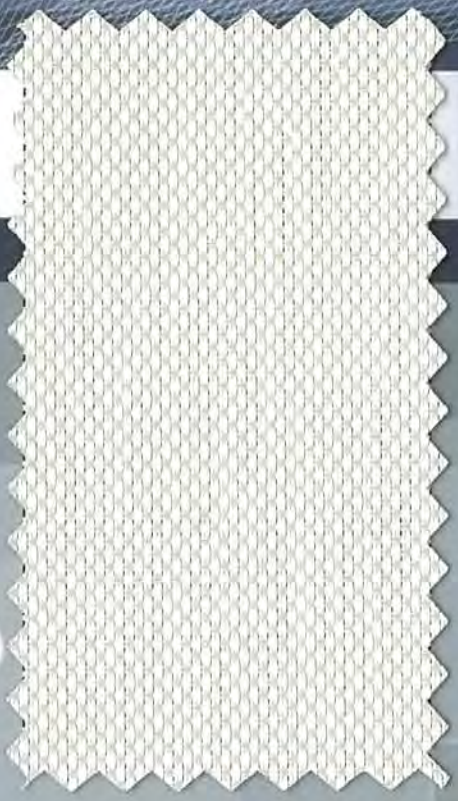

5% Opening

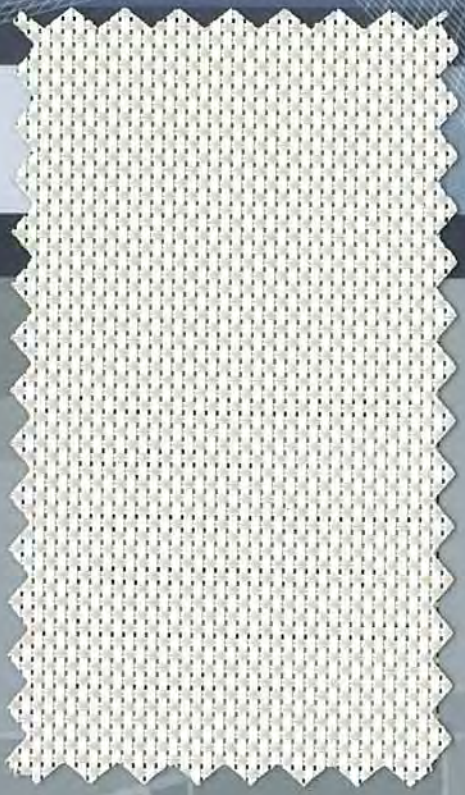

10% Opening

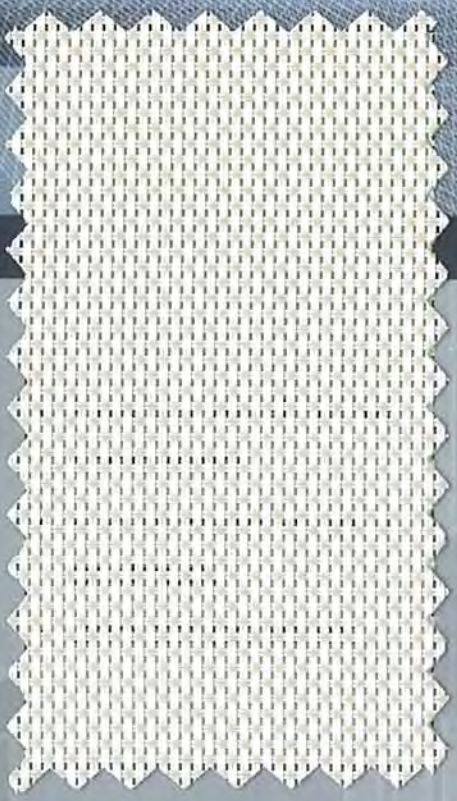

Granite

Chalk

Alabaster

Pebblestone

GREENGUARD

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818

GOLD

Greystone



Pewter

Ebony

Tobacco
Only in 5% opening

Green 4000

SPECIFICATIONS

	3% Opening	5% Opening	10% Opening
Openness Factor:	Approximately 3%	Approximately 5%	Approximately 10%
UV Blockage:	Approximately 97%	Approximately 95%	Approximately 90%
Standard Width:	72 in.(183 cm) or 98.5in. (250 cm)	72 in.(183 cm) or 98.5in. (250 cm)	72 in.(183 cm)* or 98.5in. (250 cm) Not available in all colors.
Standard Roll Length:	33 linear yards (30 meters)	33 linear yards (30 meters)	33 linear yards (30 meters)
Composition:	25% Polyester, 75% Vinyl on Polyester	25% Polyester, 75% Vinyl on Polyester	25% Polyester, 75% Vinyl on Polyester
Mesh/in:	41 Warp, 30 Fill	34 Warp, 30 Fill	34 Warp, 25 Fill
Mesh Weight:	18.87 (oz./yd^2)	17.10 (oz./yd^2)	15.34 (oz./yd^2)
Yarn diameter (in.):	0.018	0.018	0.018
Fabric Thickness (in.):	0.036	0.032	0.032
Fire Classification:	NFPA 701:2010 Test Method#1 California US Title 19 (Small Scale)	NFPA 701:2010 Test Method#1 California US Title 19 (Small Scale)	NFPA 701:2010 Test Method#1 California US Title 19 (Small Scale)
Color Fastness:	Grade 6-7 (ISO 105-B02-1994 Xenon Arc Lamp)	Grade 6-7 (ISO 105-B02-1994 Xenon Arc Lamp)	Grade 6-7 (ISO 105-B02-1994 Xenon Arc Lamp)

APPLICATIONS

GREENGUARD

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818

GOLD

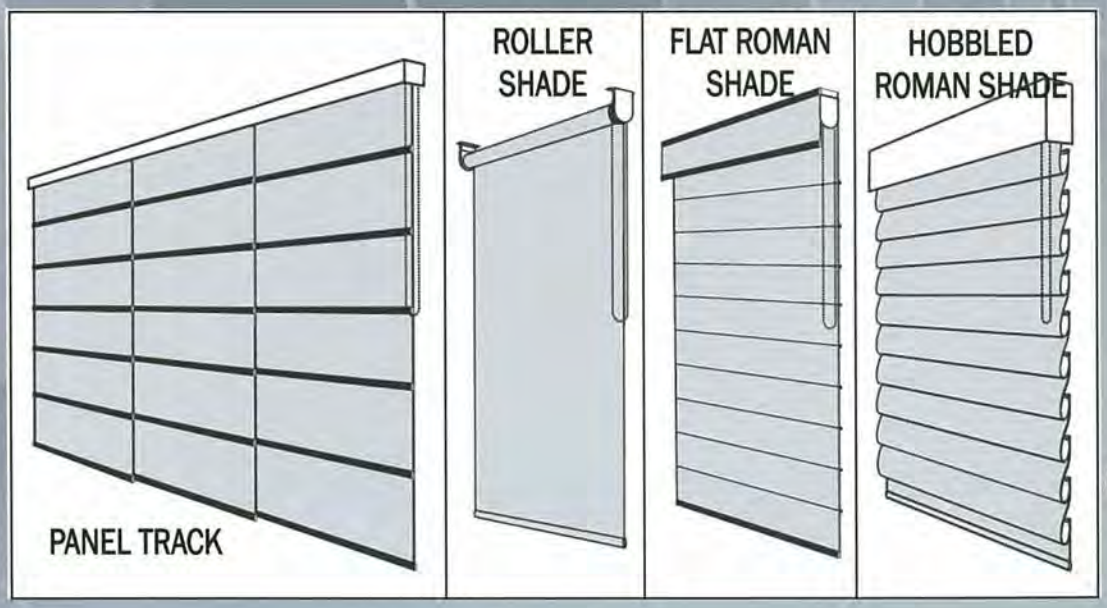

www.zmc.ca