

# GREEN 2000 5%



WHITE

IVORY

SANDSTONE

WHITE GREY

BLACK ASH

**OBSOLETE**

BLACK COPPER

CHARCOAL



# GREEN 2000<sup>5%</sup>

## SPECIFICATIONS

**5% OPENING** Z-SCREEN™ Fire Classification NFPA 701-2010 Test Method #1

### Standard Colors:


White, Ivory, Sandstone, White Grey, Black Ash, Black Brown, Black Copper, Charcoal

Openness Factor :	Approximately 5%	Yarn diameter (in.):	0.013 Warp, 0.013 Fill
UV Blockage:	Approximately 95%	Fabric thickness (in.):	0.0256
Standard Widths:	98.5" (250 cm)	Color Fastness:	Grade 7
Standard Roll Length:	33 linear yards (30m.)		ASTM G 154—UVA 340
Composition:	25% Polyester, 75% PVC	Environmental Certification:	
Mesh/in:	48 Warp, 41 Weft	GREENGUARD Indoor Air Quality Certified®	
Mesh Weight:	13.78 oz./yd <sup>2</sup>	GREENGUARD Children & Schools Certified <sup>SM</sup>	




## APPLICATION


PANEL TRACK

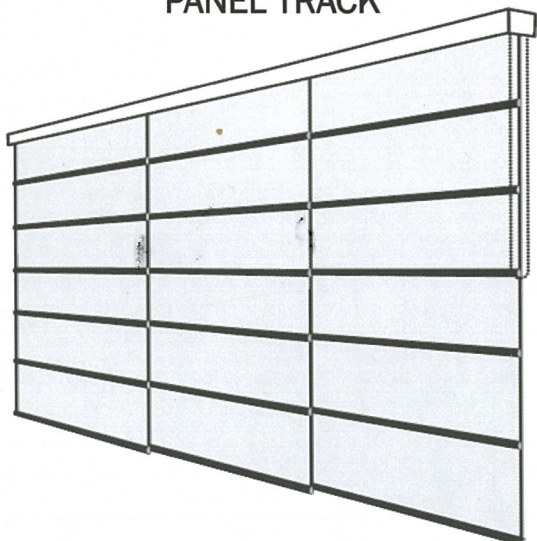

ROLLER SHADE

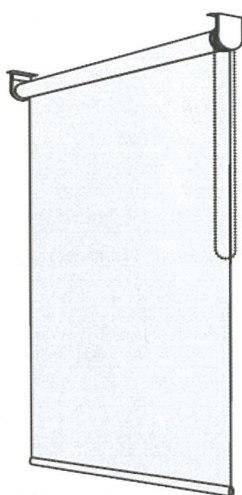

FLAT ROMAN SHADE

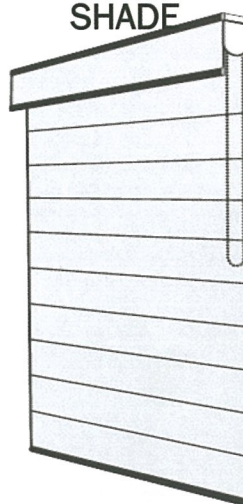

HOBBLED ROMAN SHADE

