


Green 3000 1%

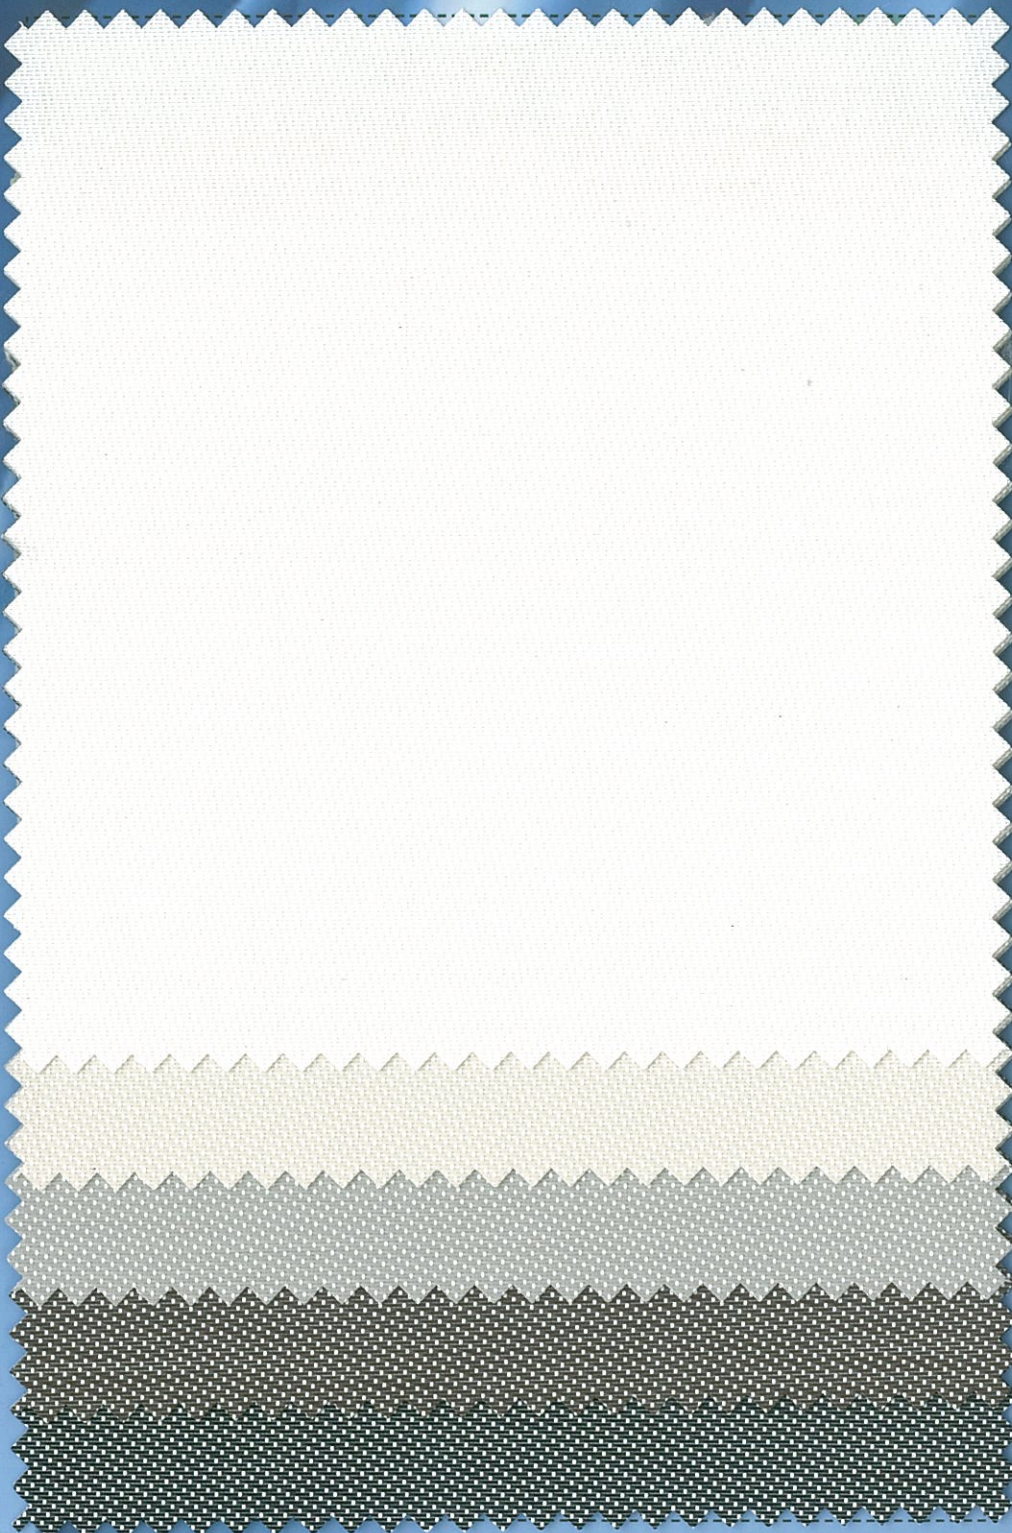

GREENGUARD

PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL COM/GG
UL 2818

GOLD

Oyster

Oyster/Beige

Oyster/Grey

Oyster/Chestnut

Oyster/Charcoal

Green 3000 1%

SPECIFICATIONS

1% OPENING Fire Classification NFPA 701-2010 Test Method #1

Standard Colors:

Oyster, Oyster/Beige, Oyster/Grey, Oyster/Chestnut, Oyster/Charcoal

Openness Factor : Approximately 1%

Yarn diameter (in.): 0.013

UV Blockage: Approximately 99%

Fabric thickness (in.): 0.027

Standard Widths: 98.5" (250 cm)

Color fastness: Grade 6-7

Standard Roll Length: 33 linear yards (30m.)

ISO 105-B02-1994
Xenon Arc Lamp

Composition: 25% Polyester,
75% Vinyl on Polyester

Environmental Certification:

Mesh/in: 66 Warp, 47 Fill

GREEN 3000-1% has achieved

Mesh Weight: 14.75 oz./yd²

GREENGUARD GOLD certification

APPLICATIONS

