



for Somfy Ultra 50AC/DC Motor Bracket and Adj.Swivel Ball Bearing Brackets (w/o end caps)



1. Use this chart as a guideline only.
2. Deduction with 1~2mm tolerance.
3. End cap thickness 1.8mm.

Tube and Fabric Deduction

For Somfy Sonesse Ultra 50DC Motor Bracket and Swivel Ball Bracket (w/o end cap)
when using Spring Loaded Idler and Indexable Coupler

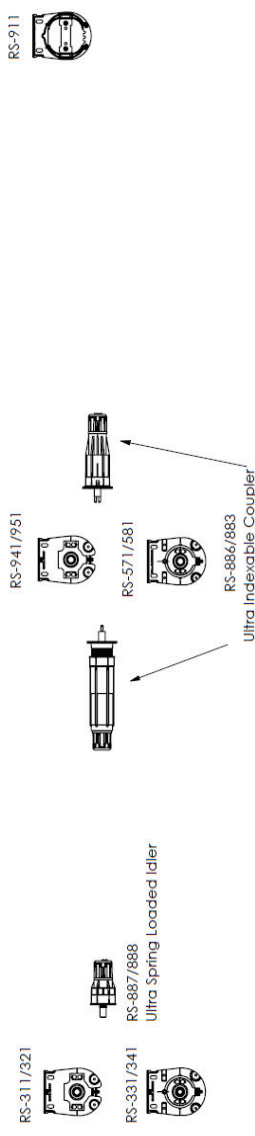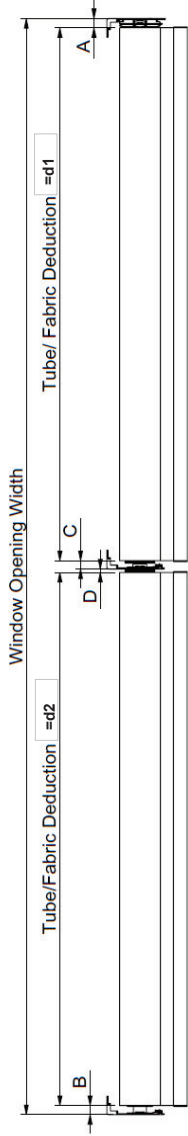

Motor Bracket Option			Ultra 50DC Motor Bracket (RS-911)															
Swivel Ball Bracket Option			RS-311/321								RS-331/341							
																		
			Light Gap				Deduc.				Light Gap				Deduc.			
Tube	Crown	Unit	A	B	C	D	d1	d2	A	B	C	D	d1	d2				
RS-013 2"Groove Tube		in	0.69	0.69	0.63	0.26	1.32	0.94	0.69	0.69	0.78	0.26	1.47	0.94				
		mm	17.5	17.5	16.0	6.5	33.5	24.0	17.5	17.5	19.9	6.5	37.4	24.0				
RS-033 2 3/8" Tube	RS-975 	in	0.75	0.94	0.69	0.31	1.44	1.06	0.75	0.75	0.84	0.31	1.59	1.06				
		mm	19	19.0	17.5	8	36.5	27.0	19	19	21.4	8.0	40.4	27.0				
RS-T66 2 1/2" Tube	RS-984 	in	0.82	0.82	0.72	0.35	1.55	1.17	0.82	0.82	0.88	0.35	1.70	1.17				
		mm	20.9	20.9	18.4	8.9	39.3	29.8	20.9	20.9	22.3	8.9	43.2	29.8				

Note: 1. Use this chart as a guideline only.
2. Deduction with 1-2mm tolerance.
3. End cap thickness 1.8mm.