



XR-Clutch

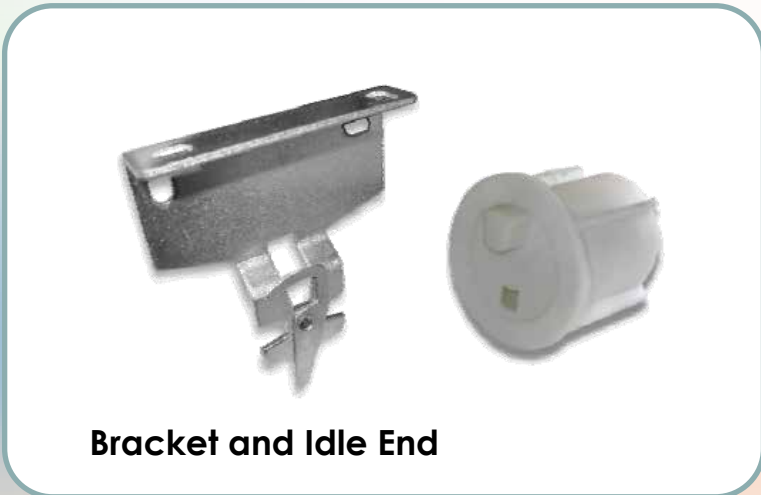


Bracket and Idle End

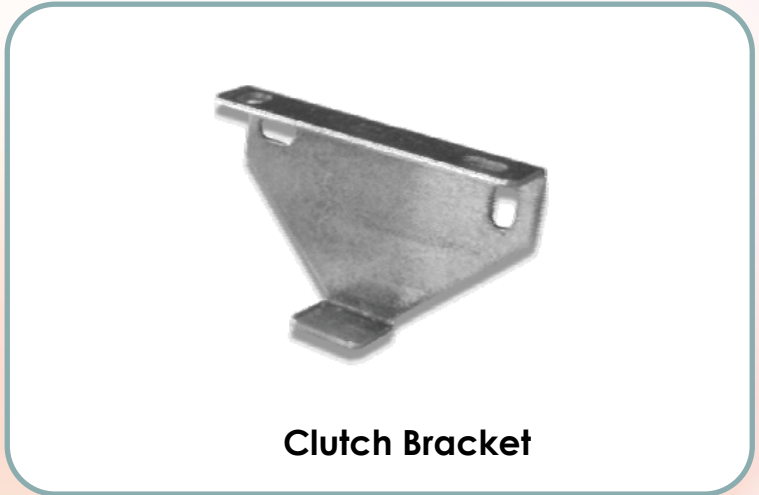

Clutch Bracket

US PAT 8556059

Roller bearing provides smooth operation.

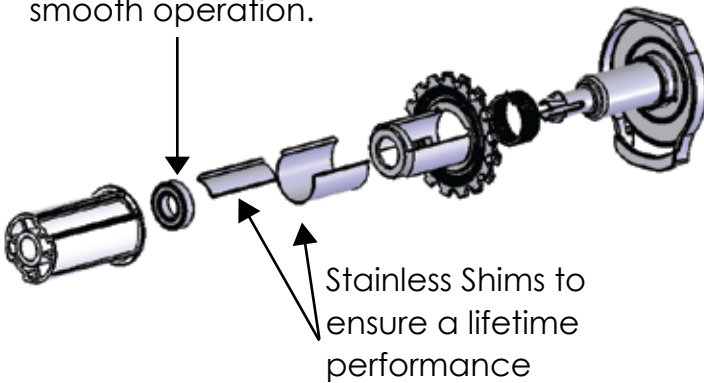

EZ-GLIDE OPTION



Pull down the shade by the bottom bar without damaging the clutch



OPTIONS AVAILABLE

OPEN ROLL			FASCIA SYSTEM		SMART CASSETTE		DUO SHADE SYSTEM	
1 1/2"	3"	3.5"	7"					
2"	4"	4"						
projection								

TUBE OPTIONS					
	RS-T46 40MM (1-1/2")	RS-T56 50MM (2")	RS-2TU 40MM (1-1/2")	RS-3TU 45MM (1-3/4")	RS-033 60MM (2-3/8")
Regular Clutch	XR-2R1,2R5	XR-2R1,2R5*	XR-2X1,2X5	XR-3X1,3X5	XR-3X1,3X5*
EZ-Glide Clutch	XR-2G1,2G5*	XR-2G1,2G5*	XR-2P1,2P5*	XR-3P1,3P5*	XR-3P1,3P5*

* For these combinations a "Spring Assist " is required



Hotels



Restaurants



Schools



Public Institutions

XR EZ-Glide Clutch + Spring Assist =

Hospitality System



For more information please contact us at:
Tel: 1.905.856.3838 or 1.800.541.2557



Website: www.zmc.ca
E-mail: contact@zmc.ca