




Tube and Fabric Deductions

For Somfy Ultra 50DC Open Roll Motor Bracket, EZ-Adjustable Coupler And Retractable Idler (w/o End Cap)

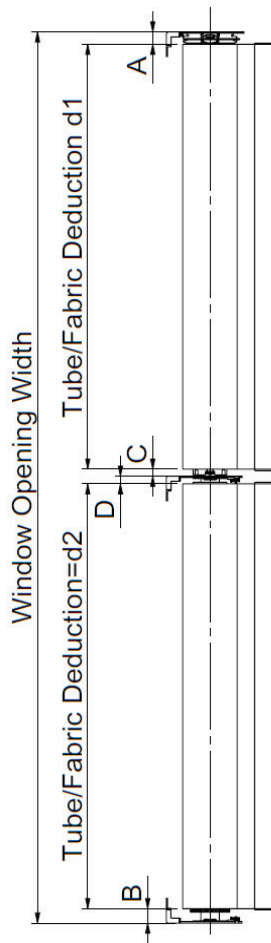

Open Roll Motor Bracket		50DC Motor Bracket (RS-911)													
Open Roll Idle End Bracket with Roller Bearing		RS-921/931, RS-941/951				RS-551/561, RS-571/581									
Tube	Crown	Light Gap				Deduction				Light Gap				Deduction	
		A	B	C	D	d1(=A+C)	d2(=B+D)	A	B	C	D	d1(=A+C)	d2(=B+D)		
2" Crown Tube RS-913		0.69	0.81	0.39	0.41	1.07	1.22	0.69	0.96	0.39	0.59	1.07	1.55		
2 3/8" Tube RS-975		17.5	20.5	9.8	10.5	27.3	31.0	17.5	24.4	9.8	15.0	27.3	39.4		
2 1/2" Tube RS-933		0.75	0.87	0.44	0.47	1.19	1.34	0.75	1.02	0.44	0.65	1.19	1.67		
2 1/2" Tube RS-964		19.0	22.0	11.3	12.0	30.3	34.0	19.0	25.9	11.3	16.5	30.3	42.4		
2 1/2" Tube RS-966		0.90	0.9	0.48	0.51	1.38	1.41	0.9	1.1	0.48	0.69	1.26	1.74		
2 1/2" Tube RS-966		22.9	22.9	12.2	12.9	35.1	35.8	19.9	26.8	12.2	17.4	32.1	44.2		

Note: 1. Use this table as a guideline only.
2. Deduction with 1-2mm tolerance.
3. End Cap thickness 1.8mm.