


Tube and Fabric Deductions

For Somfy Ultra 50AC Open Roll Motor Bracket, EZ-Adjustable Coupler And Retractable Idler (w/o End Cap)

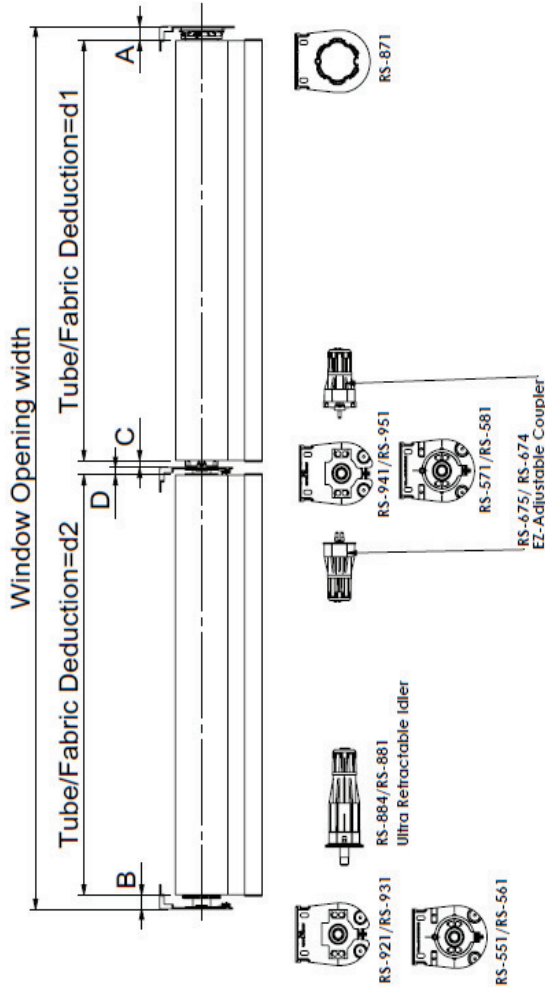

Open Roll Motor Bracket		Star Head Motor Bracket (RS-871)												
Tube	Crown	Unit	Light Gap			Deduction			Light Gap			Deduction		
			A	B	C	D	d1(=A+C)	d2(=B+D)	A	B	C	D	d1(=A+C)	d2(=B+D)
2" Groove Tube RS-013		in	0.79	0.81	0.39	0.41	1.17	1.22	0.79	0.96	0.39	0.59	1.17	1.55
		mm	20.0	20.5	9.8	10.5	29.8	31.0	20.0	24.4	9.8	15.0	29.8	39.4
2 3/8" Tube RS-033	RS-975	in	0.85	0.87	0.44	0.47	1.29	1.34	0.85	1.02	0.44	0.65	1.29	1.67
		mm	21.5	22.0	11.3	12.0	32.8	34.0	21.5	25.9	11.3	16.5	32.8	42.4
2 1/2" Tube RS-366	RS-994	in	0.90	0.9	0.48	0.51	1.38	1.41	0.9	1.1	0.48	0.69	1.36	1.74
		mm	22.9	22.9	12.2	12.9	35.1	35.8	22.4	26.8	12.2	17.4	34.6	44.2

Note: 1. Use this table as a guideline only.
2. Deduction with 1-2mm tolerance.
3. End Cap thickness 1.8mm.