



SONESSE ULTRA 50 AC/DC MOTOR


Open Roll System Tube & Fabric Deduction (without End Cap)

For Somfy Sonesse 50AC Star Head Motor and Ultra Spring Loaded Idler/ Ultra Retractable Idler

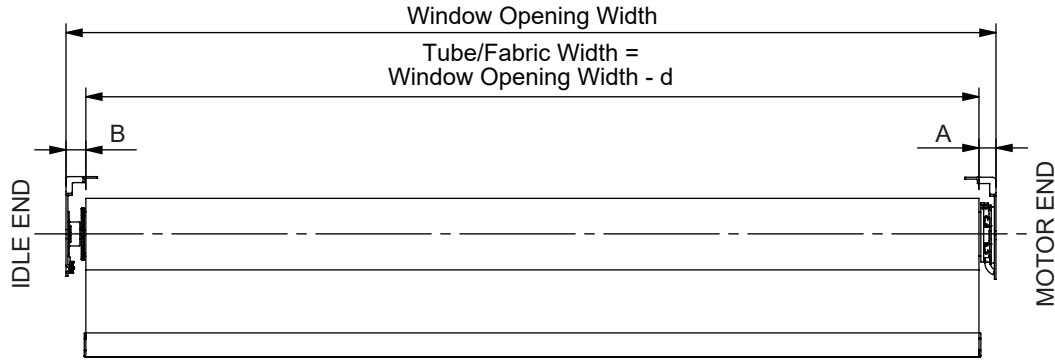

RS-871

IDLER BRACKET + IDLER OPTIONS

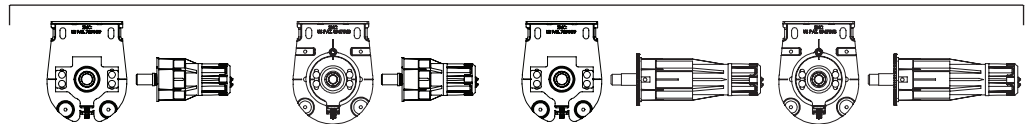

Tube	Crown	Unit	RS-311/321 + RS-887/888			RS-331/341 + RS-887/888			RS-921/931 + RS-881/884			RS-551/561 + RS-881/884		
			Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.
			A	B	d=A+B	A	B	d=A+B	A	B	d=A+B	A	B	d=A+B
 2" Groove Tube	not needed	in	0.79	1.00	1.79	0.79	1.14	1.93	0.79	0.87	1.65	0.79	1.02	1.81
		mm	20.0	25.5	45.5	20.0	29.0	49.0	20.0	22.0	42.0	20.0	25.9	45.9
 2 3/8" Tube	 RS-975	in	0.85	1.06	1.91	0.85	1.20	2.05	0.85	0.93	1.77	0.85	1.08	1.93
		mm	21.5	27.0	48.5	21.5	30.5	52.0	21.5	23.5	45.0	21.5	27.4	48.9
 2 1/2" Tube	 RS-984	in	0.88	1.10	1.98	0.88	1.24	2.12	0.88	0.96	1.84	0.88	1.11	2.00
		mm	22.4	27.9	50.3	22.4	31.4	53.8	22.4	24.4	46.8	22.4	28.3	50.7

NOTE:

1. Use this chart as a guideline only.
2. Deduction with 1~2mm tolerance.
3. End cap thickness is 1.8mm.