



# SONESSE ULTRA 50 AC/DC MOTOR

## Open Roll System Tube & Fabric Deduction (without End Cap)

For Somfy Sonesse Ultra 50DC Motor and Ultra Spring Loaded Idler/ Ultra Retractable Idler

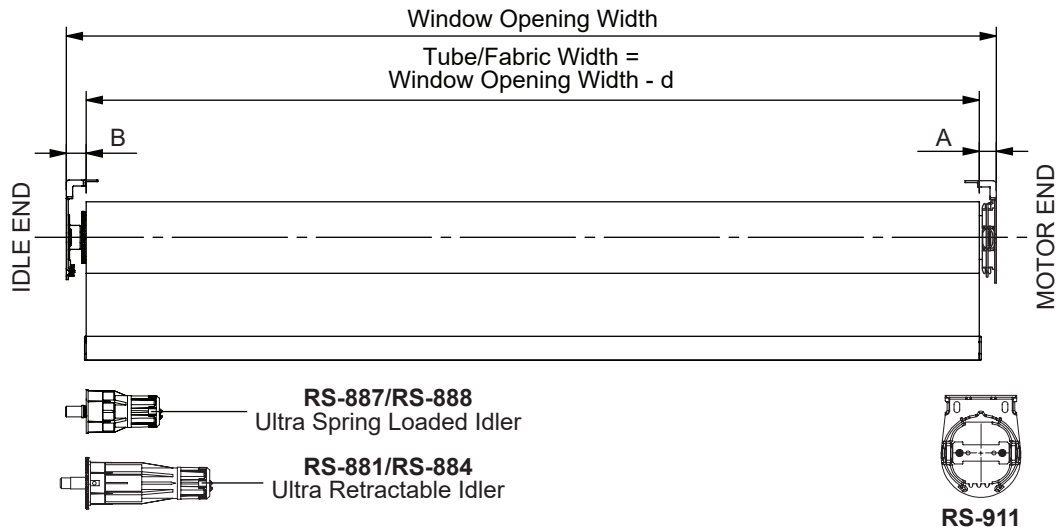

### IDLER BRACKET + IDLER OPTIONS

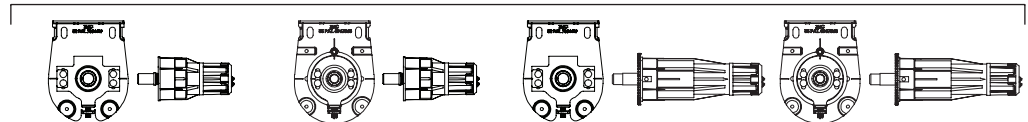

Tube	Crown	Unit	RS-311/321 + RS-887/888			RS-331/341 + RS-887/888			RS-921/931 + RS-881/884			RS-551/561 + RS-881/884		
 2" Groove Tube	not needed		Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.
			A	B	d=A+B	A	B	d=A+B	A	B	d=A+B	A	B	d=A+B
		in	0.69	1.12	1.81	0.69	1.26	1.95	0.69	0.87	1.56	0.69	1.02	1.71
		mm	17.5	28.5	46.0	17.5	32.0	49.5	17.5	22.0	39.5	17.5	25.9	43.4
 2 3/8" Tube			Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.
			A	B	d=A+B	A	B	d=A+B	A	B	d=A+B	A	B	d=A+B
		in	0.75	1.18	1.93	0.75	1.32	2.07	0.75	0.93	1.67	0.75	1.08	1.83
		mm	19.0	30.0	49.0	19.0	33.5	52.5	19.0	23.5	42.5	19.0	27.4	46.4
 2 1/2" Tube			Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.	Light Gap		Deduc.
			A	B	d=A+B	A	B	d=A+B	A	B	d=A+B	A	B	d=A+B
		in	0.82	1.22	2.04	0.82	1.35	2.18	0.82	0.96	1.78	0.82	1.11	1.94
		mm	20.9	30.9	51.8	20.9	34.4	55.3	20.9	24.4	45.3	20.9	28.3	49.2

**NOTE:**

1. Use this chart as a guideline only.
2. Deduction with 1~2mm tolerance.
3. End cap thickness is 1.8mm.